


## **GX100** Engine Assembly Information

## HONDA

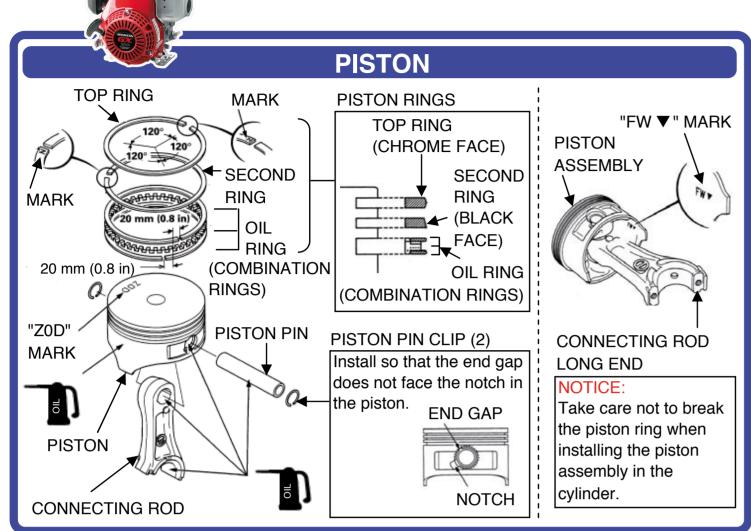

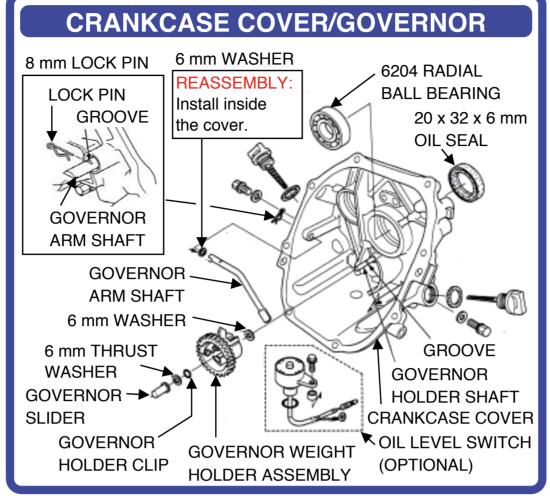

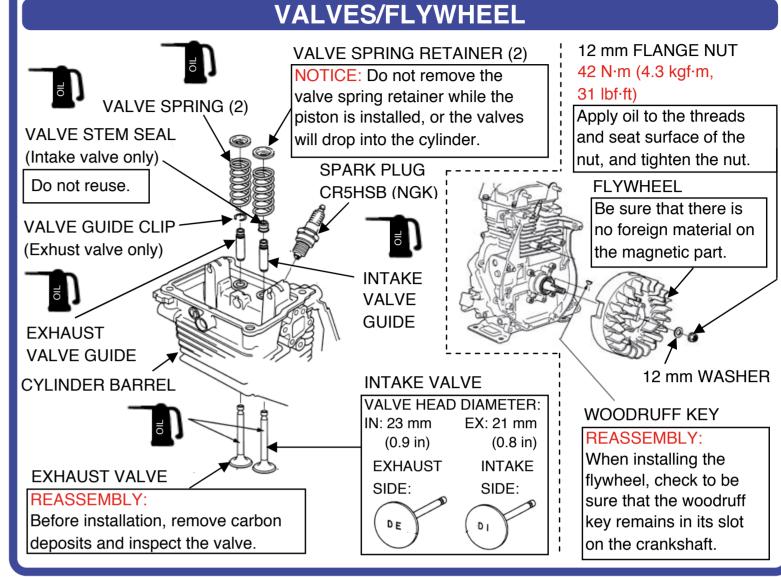


HEAD COVER


ROCKER |

SHAFT (2)


INTAKE **5** 


ROCKER

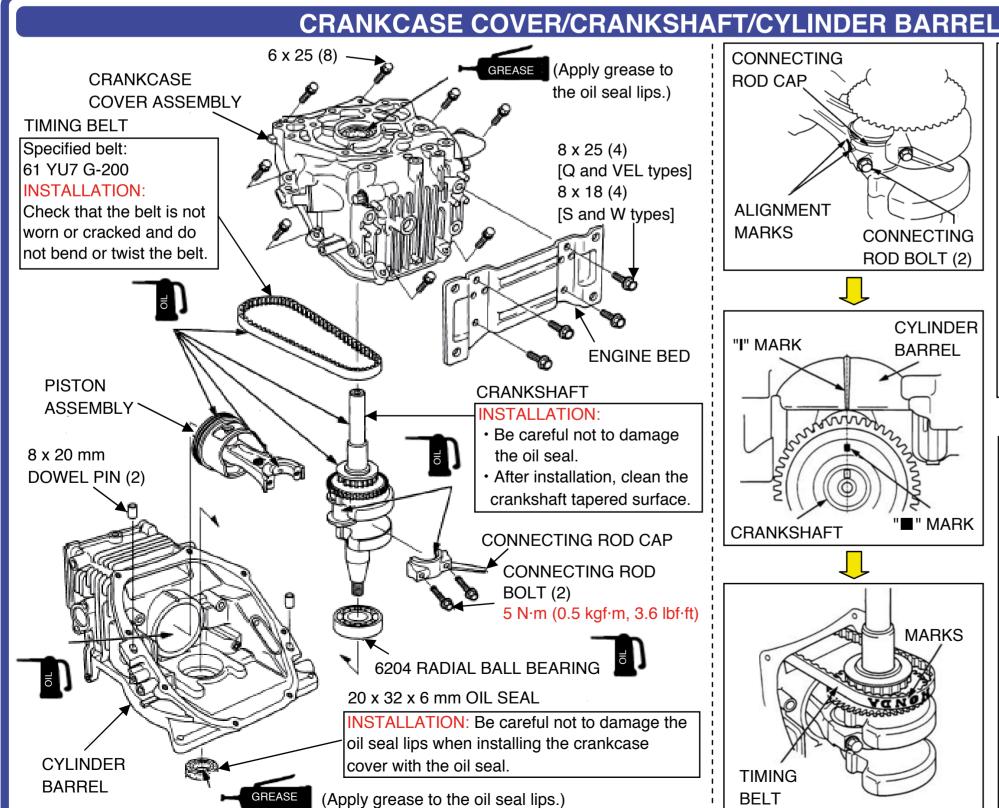


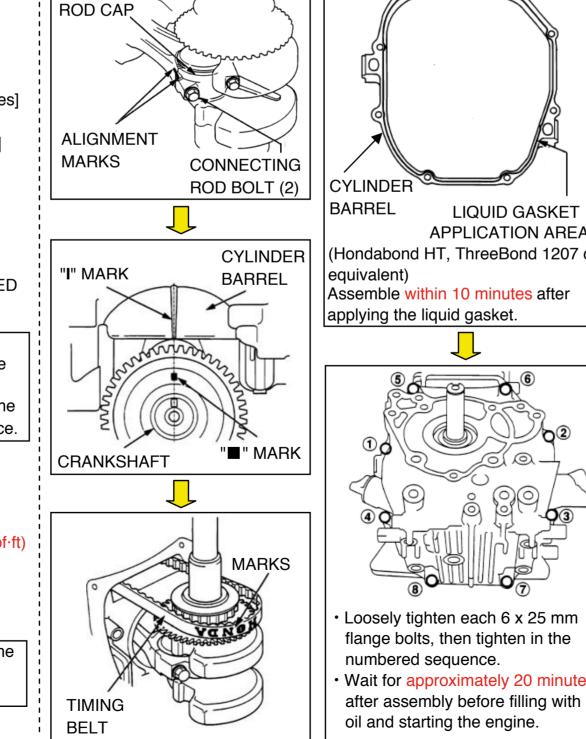

**CONNECTING** 

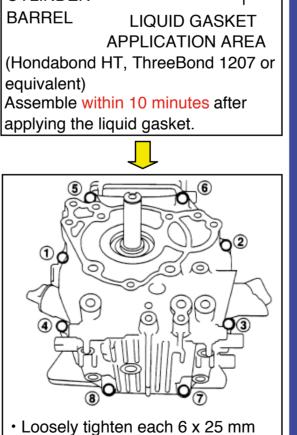

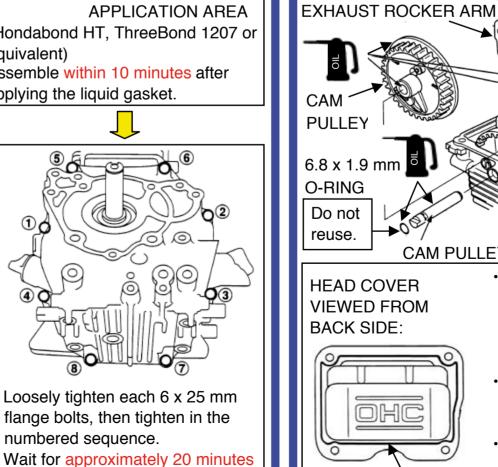



ADJUSTING 5


SCREW (2)

ADJUSTING

LOCK NUT (2)

VALVE

- Apply a liquid gasket (Hondabond HT, ThreeBond 1207 or equivalent) to the head
- Assemble within 10 minutes after applying the liquid gasket.
- Wait for approximately 20 minutes after assembly before filling with oil LIQUID GASKET and starting the engine. APPLICATION AREA

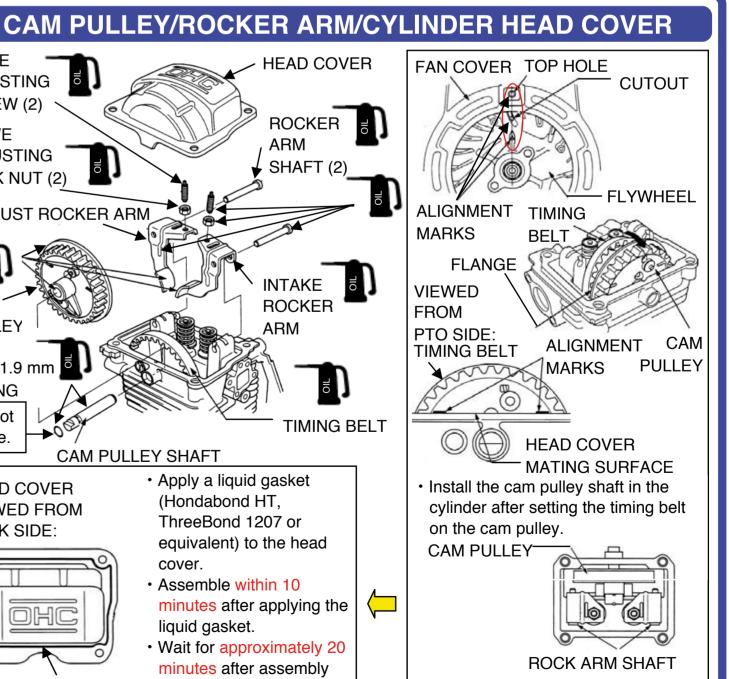

Install the rocker arm shaft from the

opposite side of the cam pulley.